
Courtyard layout · REVISED 3 Nov 2026, 10 Nov 2026 (no TV, 6 seats facing the breeze) · a level floor, movable furniture, the enclosure on the kitchen wall · Taif / Palm House V8.2

Owner decisions 3 Nov 2026 (the V8.0 layout of 1 Nov 2026 revised: no step, no built-in benches, the enclosure moved east; 10 Nov 2026: NO TV, the seating re-arranged for 6 facing the outlet arch and the enclosure, the core's face straight) · clear dimensions between finished faces · the data in `3d/character.yaml` `courtyard_layout` (built in the 3D) and `studies/air_system.typ` (the grille) · every size assumed; nothing here is for construction

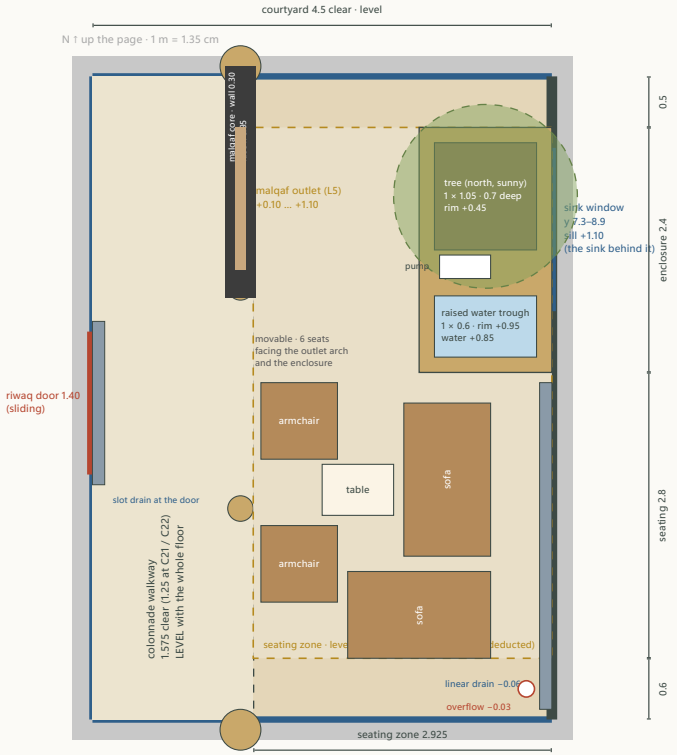

1 · The level floor and the paths

- **Courtyard:** 4.5 × 6.3 m between the finished faces (28.35 m²), **the whole floor LEVEL** (owner, 3 Nov 2026: no step anywhere; the V8.0 sunken seating is withdrawn): the colonnade walkway (1.575 m clear to the soffit edge, 1.25 at C21 / C22), the seating zone and the three cleaning strips at the glass are one surface with gentle falls (page 2). Honey-light stone, slip-resistant, no nosing, no riser light.
- **Paths kept free:** the colonnade walkway (nothing west of the soffit edge x 5.925); the riwaq door (sliding 1.40) and the living's glass (a 0.6 m strip); the women's majlis glass (a 0.5 m strip, **the north side freed**: nothing stands in front of the majlis glass any more); cleaning access along the kitchen wall between the enclosure and the chairs (0.6 m in front of the grille).

2 · Movable furniture for 6, facing the outlet arch and the enclosure (owner, 10 Nov 2026)


- **Modern movable pieces** (the owner chooses them), **every seat with a back, no poufs or stools**: **sofa A** (2 seats, 0.85 × 1.5) with its back to the kitchen wall (0.6 m behind it for cleaning) **facing west, the outlet arch** and the breeze; **sofa B** (2 seats, 1.4 × 0.85) with its back to the south strip **facing north, the tree and the water**; **two armchairs** at the colonnade edge facing the group and the enclosure; the low **table** 0.7 × 0.5 in the middle: **6 seats fit** with the paths clear (the colonnade walkway west of the soffit edge, 0.6 m at the living glass, 0.5 m at the majlis glass, 0.6 m at the kitchen wall, 0.3 m between sofa A and the enclosure). The breeze from the outlet (louvres aimed south-east) crosses the armchairs and sofa A first. Outdoor-rated fabrics, cushions stored in the hospitality kitchen's cupboard.
- **Seating area gained:** the level zone east of the soffit edge from the north strip to the south strip is 15.21 m²; less the enclosure (3.12 m²) **12.09 m² free**, against 10.53 m² in the sunken pit: **+1.56 m² (+15 %)**; and the colonnade strip (9.92 m²) is now at the same level, so the whole floor is one usable surface. **After L5 (V10.0):** the courtyard is an L-shape, 27.19 m² on axes; clear ≈ 24.88 m² (the rectangle 28.35 less the malqaf core's footprint 3.47 m² in its north-west corner); the seating zone's clear area 12.09 m² (2.925 × 5.2 less the enclosure).

3 · The enclosure on the kitchen wall: the view from the sink

- **One honey-stone box against the kitchen wall** x 7.55–8.85, y 7.1–9.5 (1.3 × 2.4 outside, walls 0.15), **directly in front of the sink window** (y 7.3–8.9, sill +1.10); 0.5 m off the women's majlis glass.
- **The planting basin (north, sunny part):** 1 × 1.05 inside, 0.7 deep, rim +0.45 (a ledge); the tree (**Laurus nobilis** standard or clipped **Ficus nitida**, a Taif nursery decides), stem 2, crown Ø1.8 centred 3 m: its crown fills the window's view (head +2.10) and shades the north part of the wall.
- **The water (south part): a RAISED trough** 1 × 0.6 inside, rim **+0.95** (below the sill +1.10), water +0.85, a laminar lip in honey stone on the wall side at +1.05 (no spray); **seen from the sink:** the sight line of a person at the sink (eye +1.60, 0.6 m behind the wall) passes the sill and reaches +0.28 at the trough's far rim (1.15 m out): the rim, the water and the lip are in view, the tree beside them. The pump and filter chamber in the divider between the two basins (cover at the rim); both basins tanked separately, each with its own drain to the rain system.

Study checks passed (9)

4 · The kitchen wall from the seating (the enclosure; no TV, owner 10 Nov 2026) · 5 · Drainage on a level floor · 6 · Dimensions

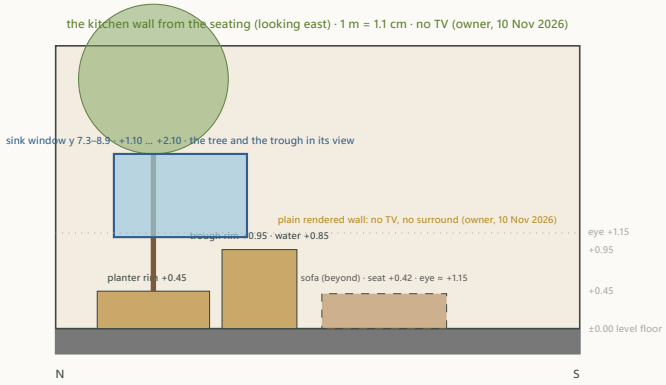

4 · The kitchen wall: the enclosure only (no TV); the malqaf outlet and the core's face

- **No TV** (owner, 10 Nov 2026): the outdoor TV and its surround are removed from the kitchen wall, with their power and data points; the wall south of the enclosure is a plain rendered wall with the linear drain at its foot. The seating faces the malqaf's outlet arch and the enclosure instead (§ 2).
- **The core's east face** (owner, 10 Nov 2026): the malqaf core's east wall is 0.30 thick on the column line (faces x 5.65–5.95), so its courtyard face is one straight line flush with the columns and the edge beam above: the chamber reads as the arcade's first bay filled; the outlet 1.4 × 1.0 (y 7.1–8.5) sits inside this wall, within the first bay (the column faces y 6.65 and 8.52); it is 0.22 m off the bay's centre (y 7.58): re-centring it to y 6.9–8.3 is proposed for the next release (the air study, the 3D, the DXF).
- **The malqaf outlet** (`studies/air_system.typ` v4, V10.0, L5): **no longer on this wall**: it sits in the first arcade arch on the west side (x 5.8, y 7.1–8.5, +0.10 … +1.10, 1.4 × 1.0, adjustable timber louvres), ≈ 1 m from the seating zone's west edge, the breeze aimed south-east across the seating; 0.6 m of free floor stays at the kitchen wall (the chairs stand west of x 8.25).

5 · Drainage on a level floor

- **Falls:** the inside floors ±0.00; the courtyard finish at the three glass lines and the riwaq door at **−0.02** (a 15 mm threshold, R-08), falling **1 % away from the glass** across the floor to the kitchen wall foot at **−0.06**: no step, a 45 mm difference over the width that nobody feels.
- **Linear drains:** a slot drain with a silt basket **along the kitchen wall foot** south of the enclosure (y 9.6–12.8, south of the enclosure) takes the whole floor; a short slot drain **at the riwaq door's threshold** (wind-driven rain at the door); the enclosure's two basins drain into the wall-foot drain's pipe. **Overflow route:** a second gully at the south-east corner with its rim at **−0.03** (3 cm above the drain level, 1.5 cm below the glass level) on its own pipe: if the drains block, the water leaves before it reaches the glass. **Trap primers** on the drains (rarely used in a dry season).
- **Pipes:** east under the kitchen floor (invert −0.55 at the drains, 1 % fall) to the **east RAIN chamber** in the yard and the soakaway (`studies/site_plan.typ`, `studies/plumbing.typ`): **never into the foul system**. **Waterproofing:** one membrane over the whole courtyard slab (lowered 0.05 for the outdoor build-up), up 0.15 behind the glass plinths and the kitchen wall base; the enclosure's two basins tanked separately.
- **Engineer / MEP to confirm:** the slab recess for the planter (0.75), the drain and pipe sizes, the rain chamber and the soakaway.

6 · Dimensions (clear, between finished faces)

Item	m	Note
Courtyard clear, level	4.5 × 6.3	the rectangle 28.35 m²; after L5 ≈ 24.88 m² clear (the L-shape; 27.19 m² on axes); no step
Colonnade walkway	1.575 / 1.25	to the soffit edge / at C21–C22; kept free
Seating zone (level)	2.925 × 5.2	12.09 m² free of the enclosure; was 10.53 m² in the pit: **+1.56 m²**
Furniture	6 seats	two 2-seat sofas, two armchairs (every seat with a back), a low table 0.7 × 0.5 all movable; facing the outlet arch and the enclosure
Cleaning strips	0.6 S · 0.5 N · 0.6 E	at the living glass / the women's majlis glass / the kitchen wall
Enclosure	1.3 × 2.4	on the kitchen wall, y 7.1–9.5, in front of the sink window; walls 0.15
Planting basin (north)	1 × 1.05 × 0.7	rim +0.45 tree crown Ø1.8 at 3 m
Water trough (south, raised)	1 × 0.6 × 0.35	rim +0.95, water +0.85, lip +1.05 seen from the sink (sill +1.10)
TV	none	removed from the kitchen wall with its surround and its power / data points (owner, 10 Nov 2026)
Malqaf core's east wall	0.30 on the column line	faces x 5.65–5.95: the courtyard face flush with the columns and the edge beam
Malqaf outlet (V10.0, L5)	1.4 × 1	x 5.8, y 7.1–8.5, +0.10 … +1.10 in the first arcade arch on the west side; bottom 0.1 above the floor
Levels	−0.02 / −0.06	the glass lines / the kitchen wall foot; overflow rim −0.03 pipe invert −0.55

What changed on 3 Nov 2026 (owner) and where

- The step, the nosing, the riser light and the three built-in benches are **removed**; the floor is level; the furniture is movable. The enclosure left the north side (the women's majlis glass is free) for the kitchen wall in front of the sink window; the TV (removed altogether on 10 Nov 2026, with its surround) had moved south; the malqaf outlet is in the west arcade since V10.0. The data: `3d/character.yaml courtyard_layout`

(built in the 3D: `character_3d.py`, checked in `check_3d.py`); the plan marks in `design_gf.typ`; the drains in `studies/plumbing.typ` (the rain system).

The 9 checks are listed with their pass line on page 1. Every size assumed; the owner chooses the furniture; the engineer and the MEP engineer confirm the recess, the drains and the pipes.