
Taif farm – north zone, FINAL site baseline v2, 03 Oct 2026

Driveway on the straight M line from the gate east post (G′ = M1). Field check of 03 Oct: 44 tapes, least-squares fit. Concept baseline – not for permit.

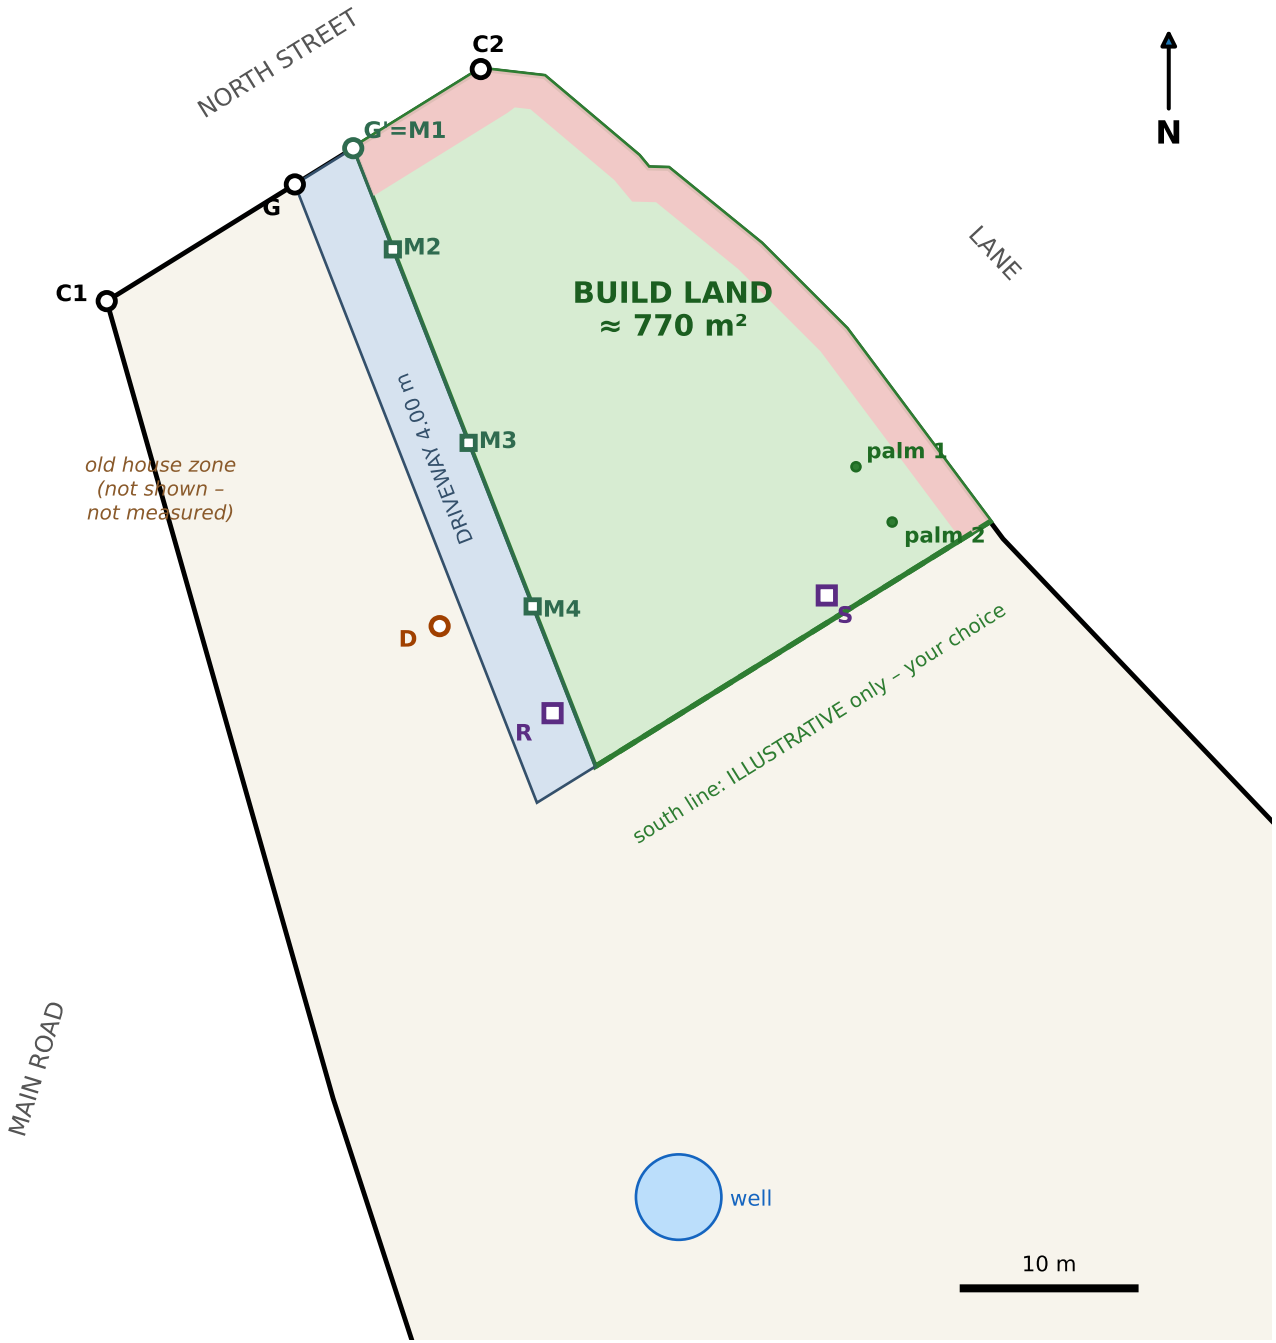

Farm plot (deed)

Build land (south line illustrative)

Setbacks: 3 m north street, 2 m lane

Driveway 4.00 m on the M line (decided)

M1–M4 pegs on the M line R, S pegs

AREAS (depend on your south line)
Build land as drawn: ≈ 774 m² (v1: 596)
Setback strips inside it: ≈ 106 m²
Left after setbacks: ≈ 668 m² (v1: 494)

DRIVEWAY / M LINE
Angle to the north wall ≈ 100° (fit range 97–102°)
M1→M2 6.36 · M2→M3 12.16 · M1→M4 28.80 m
Clear width square to the line ≈ 3.95 m

PALMS (trunks 0.53 m)
Palm 1 centre ≈ 4.4 m, palm 2 ≈ 4.6 m from the lane line
≈1.9 m further south-east along the wall than v1

KNOWN TOLERANCES
- Lane wall vs deed line: within 0.1–0.4 m (now checked)
- Driveway angle ±2.5° → ±1.5 m at the south end (the M pegs are on the ground: design from them)
- Old house: not shown (not measured)
- South line – your choice (drawn parallel to the north wall, 3 m south of palm 2)

Field check 03 Oct 2026 – what it fixed

METHOD

Straight M line pegged from the gate east post (M1 = G′) with pegs M2, M3, M4. Every point taped from several pegs; all 44 usable tapes fitted together (rows 1–4 place the gate) by least

Fit quality: rms 0.27 m. Not used: row 5 (G→D, tape not straight), row 11 (G′→C2, conflicts with row 4), row 19 (M3→E3, 1.9 m off). Rows 57–58 down-weighted (E5/E6 labels doubtful).

RESULTS

- North wall: C1→G 12.89 + gate 4.00 + G′→C2 8.74 = 25.63 m vs whole wall 25.60 m → closes within 0.03 m.
- Driveway (M line) meets the north wall at ≈ 100° (all leave-one-out fits 97–102°), heading ≈ 159°.
- Lane wall: the taped wall marks E2–E6 sit within 0.06–0.37 m of the deed line → wall = deed line is now confirmed.
- Palms: centres ≈ 4.38 m and 4.61 m from the lane line; trunk faces ≈ 2.1 / 2.35 m inside the 2 m setback line.
- Palms sit ≈ 1.9 m further south-east along the wall than in v1 (the long tapes from the gate were right).
- Dakka corner D: 5.5 m west of the M line → 1.5 m clear of the 4 m driveway.

WARNING – v1 driveway direction was wrong

v1 drew the driveway square to the north wall (88° ± 3°) from the old G′→D tape "28 m" with no centimetres. The new tapes (G′→D 28.41, M4→D 5.60, G→D 27.30) and the whole east-wall network give ≈ 100°. A square driveway is geometrically impossible with these readings. v2 replaces v1.

WHAT CHANGED FROM v1 (24 Sep)

Item	v1	v2
Driveway angle to the north wall	≈ 88°	≈ 100°
Build land (illustrative south line)	≈ 596 m²	≈ 774 m²
Buildable envelope after setbacks	≈ 494 m²	≈ 668 m²
Palms along the lane wall	±1–2 m	≈ 1.9 m further SE, ±0.3 m
Lane wall = deed line?	assumed	checked, ±0.4 m

DECISIONS

D1 Driveway = the straight M line from the gate east post: east edge on M1–M4, west edge parallel through the gate west post (4.00 m gate, ≈ 3.95 m clear square to the line).

D2 Setbacks 3 m from the north street, 2 m from the lane (confirm with Balady / the engineering office).

D3 Old house and carport not shown (not measured, outside the build land). South line: open – drawn illustratively.

CLOSED – no more tape; handed to the engineering office survey

Driveway angle ±2.5° (≈ ±1.5 m at the south end) · palms ±0.3 m · gate on the deed ±0.3 m. Before the design is final: string the outline on the ground from the M pegs.