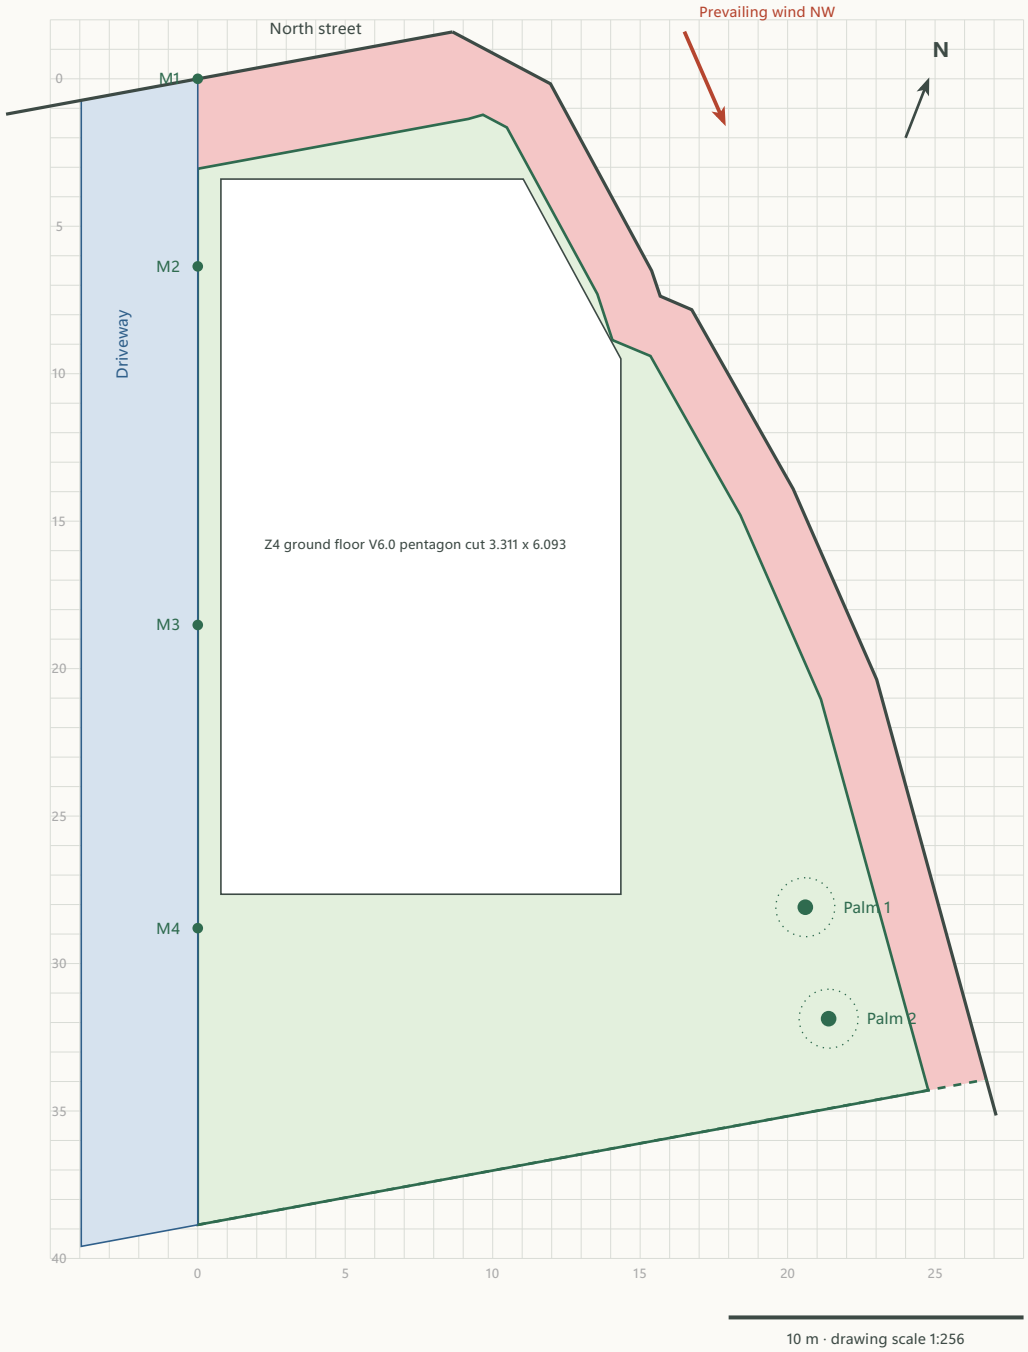


Taif / Palm House

Site test · Z4 ground floor V6.0 pentagon cut 3.311 x 6.093 · 13.56 × 24.25 m · 0° · NE cut 3.31 × 6.09

Building rectangle only · outside wall faces · env margin 0.5 m · palm clearance 1 m

Inside the buildable envelope	yes	✗ NO
Smallest gap to the envelope (incl. M line)	0.05 m	✗ NO
Palm 1: gap to trunk face · beyond the south facade	6 m	✓ OK
Palm 2: gap to trunk face · beyond the south facade	7.95 m	✓ OK
Open land west of the building (to the M line)	19.04 m²	
width at NW corner / middle / SW corner	0.79 / 0.79 / 0.79 m	
Most northern point, along the M line (y)	3.4 m	
Reach towards TRUE north (projection from M1)	0.86 m	
Area (outside faces)	318.77 m²	

Drawing "up" is the M line, not true north (true north is 21.4° off). Edges checked every 5 cm. "Beyond the south facade" = the palm lies past the extended line of the south facade. The red warnings below repeat the envelope check only.

✓ **All checks passed**

Areas

Envelope	**667.87 m²**
Building limit (envelope unless set)	**667.87 m²**
Other open voids	**318.77 m²**
Courtyard (open to sky)	**0 m²**
Rooms placed (0)	**0 m²**
Limit minus courtyard and voids	**349.1 m²**
Air channel + duct	**0 m²**
Not yet assigned	**349.1 m²**

Orientation

True compass vs the M line	**21.4°**
NW wind vs the M line	**23.6°**

Concept only. Wind: Global Wind Atlas (area data, 10 m), NW ≈ 15–20 %, SE ≈ 7–8 %. Confirm on site with a ribbon test.

Schedules

All coordinates in metres from M1: x east (square to the M line), y along the M line southwards.

Envelope corners

Corner	x	y
V1	0	38.86
V2	0	3.05
V3	9.18	1.36
V4	9.67	1.22
V5	10.48	1.65
V6	13.55	7.3
V7	14.06	8.86
V8	15.35	9.4
V9	18.4	14.8
V10	21.13	21.04
V11	24.77	34.3

Rooms

No rooms yet. Add rows to the room CSV.