
Bedroom 1 (the young children’s room) with its own bathroom · short study


11 Nov 2026 · the owner’s brief · nothing in the design files changed · CSV frame, north up

The brief: the whole north-east corner for bedroom 1 and a bath of its own (WC, basin, a wall-mixer shower over a floor drain), **beside the master bath on a common wet wall and the same stack**; the master bath may give space, but **no column or beam moves**; the bedroom rectangular (straight walls, no jogs) with a bed, a wardrobe and a desk, the bath door from inside the room; the drains over service rooms only. **Fixed:** the cut wall (RC, C30–C32), the east wall (C32, C33), the x 8.95 wall (C24–C26), **beam B6 on y 6.5** (the bedroom 1 / suite wall), the suite’s stack outside the east wall at y 7.05.

A · the bath over the laundry (y 4.7–6.5), the bedroom shorter

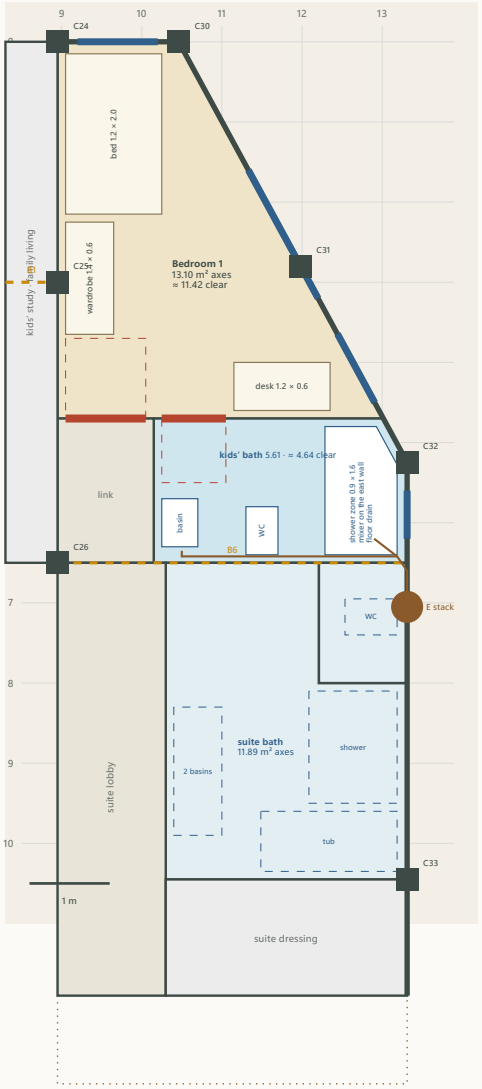

B · the bath in the master bath’s north strip (y 6.5–8.0), the bedroom whole

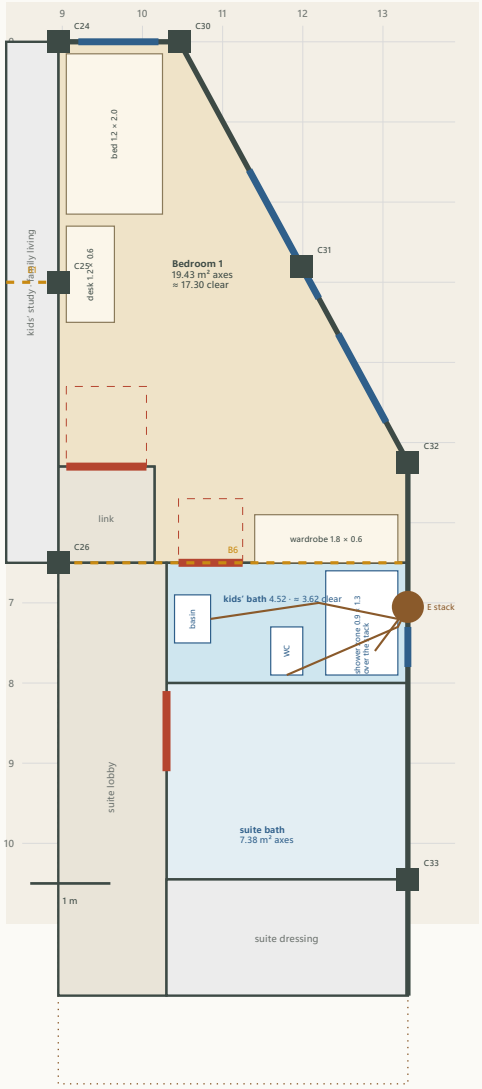

Sizes (m², on axes · clear inside the walls)

Item	A	B
Bedroom 1 today, axes · clear	19.43 · 17.30	19.43 · 17.30
Bedroom 1, clear	**11.42**	**17.30**
… on axes	13.10	19.43
Kids’ bath, clear	**4.64**	**3.62**
… on axes · clear width	5.61 · 1.60	4.52 · 1.30
Shower zone	0.9 × 1.6	0.9 × 1.3
Master bath + WC closet, axes	11.89 (as now)	7.38
Master bath loses	nothing	the WC closet and its north band (4.52 m²), the tub or a basin, its door moves
Family link	1.2 × 1.8	1.2 × 1.2 (as now)
Nearest fixture → the stack	2.05 m	1.61 m
Below the bath	the laundry (service)	the kitchen’s north band (service)
Columns inside a room	none (C32 in the shower’s corner wall)	none

A′ (numbers only): the bath 1.5 deep (y 5.0–6.5, clear width 1.3): bedroom 12.58 m² clear (14.35 axes), bath 3.81 clear; the bath’s north wall then stands 0.3 m off the laundry wall below (allowed on a slab, but one more line to set out).

Checks A: passed (7)
Checks B: passed (7)

Ochre: the bedroom; blue: the baths, fixtures, windows; red: the doors, the leaf’s swing dashed; amber dashed: beams B6, B1; black squares: the columns (`studies/structure.typ`); brown dot: the suite’s stack; brown lines: the new branches; brown dotted: the ground floor below. Clear = inside the walls (0.10 a side, outer 0.125). Checks: fixtures and furniture inside their rooms and the cut’s inner face, no overlaps, no leaf on a piece, the bath over service rooms, the common wall and the stack, no column inside a room, no jog.

What each layout does · recommendation · الخلاصة

Layout A · the bath over the laundry, north of the common wall

- **The walls:** the bedroom's south wall becomes **one straight line on y 4.7** from the x 8.95 wall to the cut, directly over the ground-floor laundry / maid-wing wall; the family link's north wall moves with it (the link 1.2 × 1.8) and the link's east wall x 10.15 runs on to y 4.7 as the bath's west wall. The bedroom is a clean four-sided room (three straight walls + the cut), **11.42 m² clear** (today 17.30): the bed 1.2 × 2.0 under the north window, a 1.4 m wardrobe on the west wall, a 1.2 m desk on the south wall under the shortened second window; the escape window on the cut unchanged.
- **The bath** 4.64 m² clear, 1.6 m wide: the **shower zone 0.9 × 1.6 in the east end** with the mixer on the east wall and the floor drain by it, **the clipped corner of the cut and column C32 in the shower's corner** (the owner's rule: a column in a bath is used, not fought); the WC on the common wall y 6.5 (B6 below it: the pipes run in the floor screed and the wall above the beam, never through it); the basin on the west wall by the door. Its door 0.80 at the west end of the y 4.7 wall, from inside the bedroom, opening into the bath. A 0.6 m window on the east wall (over the laundry's) and an extract fan.
- **Plumbing:** every branch over the **laundry** (a service room with its own floor drain below), the longest 3.3 m along the common wall to the east wall and out to the **suite's stack** 0.55 m south of the wall: the same stack, one more cleanout at the wall. The wet wall y 6.5 serves both baths (the suite's WC closet on its other side).
- **Structure:** nothing moves. The y 4.7 wall and the x 10.15 wall are light partitions on the slab (the GF wall below y 4.7 makes the first a wall over a wall).
- **Cost to the master suite:** none.

Layout B · the bath in the master bath's north strip

- **The walls:** the bedroom keeps its whole shape (17.30 m² clear); the kids' bath takes the suite WC closet and the north band of the suite bath (x 10.3–13.311, y 6.5–8.0): 3.62 m² clear, 1.3 m wide, the shower directly over the stack, the WC on the new common wall y 8.0, the basin on the west wall; its door through the B6 wall (a door under a beam is normal), opening into the bedroom's entry strip, the wardrobe moved east of it.
- **The master bath:** from 11.89 to 7.38 m² on axes; it **loses its WC closet**, so the WC comes back into the bath (in the tub's place, or the double vanity becomes single), and **its door moves** south to y 8.1–9.1 (the door today is where the kids' bath sits). The suite's shower, tub drain and vanity branches then cross under the kids' bath to the stack (they already run there).
- **Structure and plumbing:** nothing moves; over the kitchen's north band (a service room) inside the suite bath's sunken tanked slab (X10).
- **Cost to the master suite:** real: a smaller bath, no WC closet, a re-planned door and vanity.

Recommendation: Layout A

It gives the children a real bath (4.64 m² clear, a 0.9 × 1.6 shower) **on the common wall and the same stack** without touching the master bath, keeps every column and beam where it is, and leaves bedroom 1 a **clean rectangle-with-the-cut of 11.42 m² clear**, enough for a bed, a wardrobe and a desk for young children, with its escape window unchanged. The only loss is 5.88 m² of the bedroom, most of it the entry strip along the suite wall that held only the wardrobe. Layout B keeps the room but costs the master suite its WC closet, its door and a vanity, for a narrower kids' bath (1.3 m): the trade the owner allowed "if needed", and it is not needed.
If the owner wants the bedroom bigger: A′ (the bath 1.5 deep) gives back 1.15 m² for a 1.3 m wide bath.
To apply (next round, LEAN): `data/rooms_ff.csv` (bedroom 1 → the y 4.7 trapezoid; a new row "Bedroom 1 bath"; the family link 1.2 × 1.8), `studies/ff_family.typ` (the rooms, the doors, the shortened second window, the bath window, the fixtures), `studies/plumbing.typ` (three branches to the east stack), the presentation's sheet 03 and its note, sheet 05 (the family first floor) and sheet 08; the 3D and the DXFs at the release.

الخلاصة بالعربية

غرفة النوم 1 (غرفة الأطفال الصغار، الركن الشمالي الشرقي) تأخذ الركن كله وتحصل على حمّام خاص: مرحاض ومغسلة ودُش بسيط (خلاط على الجدار فوق مصرف أرضي، بلا حوض ولا كابينة).
التصميم A (الموصى به): الحمّام فوق غرفة الغسيل، شمال الجدار المشترك مع حمّام الجناح الرئيسي (خط الجسر B6 على y 6.5)، على الجدار الشرقي بجانب ماسورة الصرف نفسها (0.55 م جنوب الجدار). جدار الغرفة الجنوبي خط واحد مستقيم على y 4.7 فوق جدار جناح الخادمة؛ الغرفة 11.42 م² صافية (اليوم 17.30) بسرير 1.2 × 2.0 وخزانة 1.4 م ومكتب 1.2 م؛ الحمّام 4.64 م² صافية بعرض 1.6 م، منطقة الدُش 0.9 × 1.6 في الطرف الشرقي حيث زاوية الجدار المائل والعمود C32 داخل جدار الزاوية. لا يتحرك أي عمود أو جسر، وحمّام الجناح الرئيسي لا يخسر شيئًا.
التصميم B: الحمّام داخل الشريط الشمالي لحمّام الجناح (y 6.5–8.0) فتبقى الغرفة كاملة (17.30 م²)، لكن حمّام الجناح يخسر غرفة المرحاض وبابه ومغسلة، ويضيق حمّام الأطفال إلى 1.3 م.
التوصية: A. وإن أراد المالك غرفة أكبر: A′ بحمّام عمقه 1.5 م يعيد 1.15 م² للغرفة.

Kids' room study · bedroom 1, the suite rooms and the link from `data/rooms_ff.csv`; the columns and B6 from `studies/structure.typ` (sizes assumed, the engineer's); the stack from `studies/plumbing.typ`; the ground-floor rooms from `data/rooms_gf.csv` (the maid wing D, 11 Nov 2026). The shower is a wet zone: tanked floor with falls to the drain, a fixed glass panel at its edge if the owner wants one. Door swings drawn as boxes (the leaf's reach); the bedroom door opens into the room, the bath door into the bath (A). Not a code check.